

chipscreen

Firstgrade's Chipscreen uses a simple rotary motion to provide highly efficient screening of loose products such as woodchips and bark. The 3 way split produces fines, main product and oversize in one pass. Oversize can be conveyed back to the shredder for re-grinding. The standard 4m x 2m Chipscreen has a throughput of over 100m³/hr and a power requirement of just 5.5kW.



features

- 3 way split
- Rotary motion
- Fully balanced vibration
- 5.5kW Electric drive

options

- Screen size
- 3 or 4 way split
- Automatic greasing

applications


- Wood-waste
- Bark
- Mulch
- Animal bedding
- Playground chips

design, build and install

All of **firstgrade's** recycling machinery is designed and built here in the UK, using the latest Computer Aided Design technology. This, together with our engineering expertise, gives us the flexibility to produce high specification systems to suit individual requirements.

other products

- Vibrating Feeders
- Elevators
- Conveyors
- Vibrating Screens
- Picking Stations

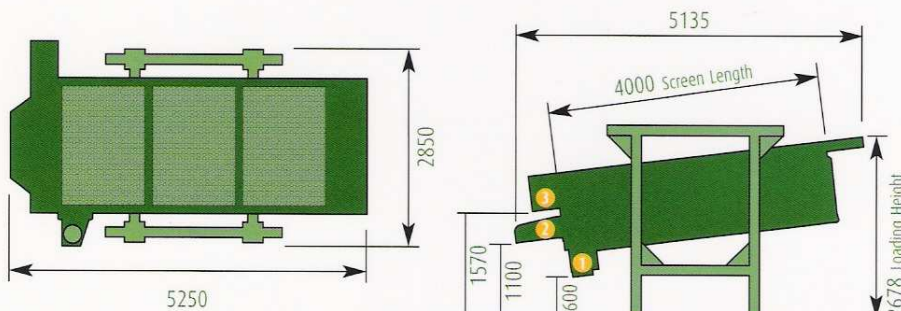

① Fines ② Mid-Size ③ Oversize Discharge



Firstgrade Recycling Systems Ltd
Hollow Road Farm
Hollow Road
Bury St Edmunds
Suffolk
IP31 1SJ

t 01284 717061
f 01284 717104
e sales@first-grade.co.uk
w first-grade.co.uk